HiTi Picvite Kiosk
user manual

HiTi Digital, Inc.
www.hiti.com

CONTENTS

PREFACE

- How do I Setup Picvite Kiosk System? - - - - - 02
- Back End: Parameter Introduction - - - - - 03
  - Configuration
    - ▶ General - - - - - 04
    - ▶ System Information - - - - - 05
    - ▶ Store Information - - - - - 07
    - ▶ File Device and Resource - - - - - 09
    - ▶ Screen Saver - - - - - 10
    - ▶ Password - - - - - 11
    - ▶ System Update - - - - - 12
    - ▶ Log - - - - - 13
  - Operation
    - ▶ Language - - - - - 14
    - ▶ Choose Application - - - - - 15
    - ▶ Size - - - - - 16
    - ▶ Price and Tax - - - - - 17
    - ▶ Application Setting - - - - - 19
  - Output and Printer
    - ▶ Printer - - - - - 25
    - ▶ Color Setting - - - - - 26
    - ▶ Connect - - - - - 27
- Frot End: User Operation Flow
  - Photo - - - - - 28
  - Print All - - - - - 29
  - Index Photo - - - - - 30
- How do I print photo? - - - - - 31

Declarations

Warranties

Although the best efforts are made to ensure that the information in this manual is complete and correct, HiTi Digital, Inc. makes no warranty of any kind with regard to this material, including but not limited to the implied warranties of marketability and fitness for a particular purpose. Information in this manual is subject to change without notice. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information recording and retrieval systems without the express written permission of HiTi Digital, Inc.

Trademarks

Windows is a registered trademark of Microsoft Corporation.
Frame Maker is a registered trademark of Adobe Corporation.

Printing History

New editions of this manual incorporate new and changed material since the previous edition. Minor corrections and updates may be incorporated into reprints of the current edition without changing the publication date or the edition number.

dition	Month	Year	Software
1st	September	2010	1.0

Remarks

◆ Please run the system on the 1024 x 768 resolution or higher.
◆ Please set the parameters of「Output and Printer」/「Printer」before printing (Page 25)

How do I Setup Picvite Kiosk system?

Description

Before starting Picvite Kiosk, we should know how to log in the configuration page, please double click on the HITI logo (as picture above) using mouse or touch screen and you will see password key-in screen. The default password is 『1234』, while you can change this password in the password function.

Back End: Parameter Introduction

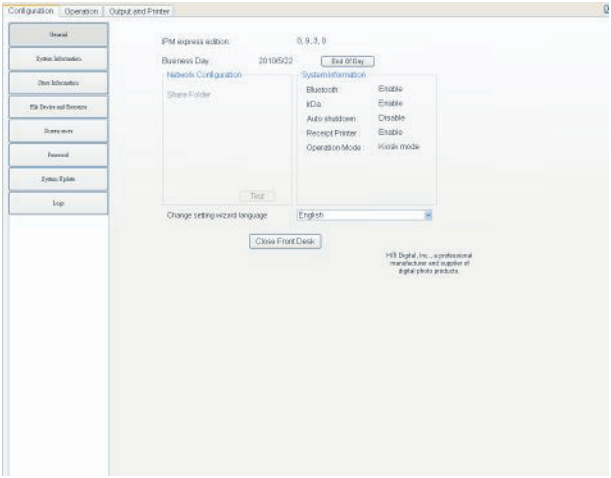

Description

After login into configuration page, it is available to setting parameters－**Configuration.** Every function can be identified easily.

► General

System status, user may check all device status in this page.

► System Information

Kernel parameters of the system can be found in this page.

► Store Information

All store relative information and parameters.

► File Device and Resource

External device including Blue tooth, IrDA, Scanner settings can be found in this page.

► Screen saver

Screen saver setting page.

► Password

System login password, only one set of login password is available in this version.

► System Update

System remaining for upgrading function

► Log

System and Transaction log parameters in this page.

General

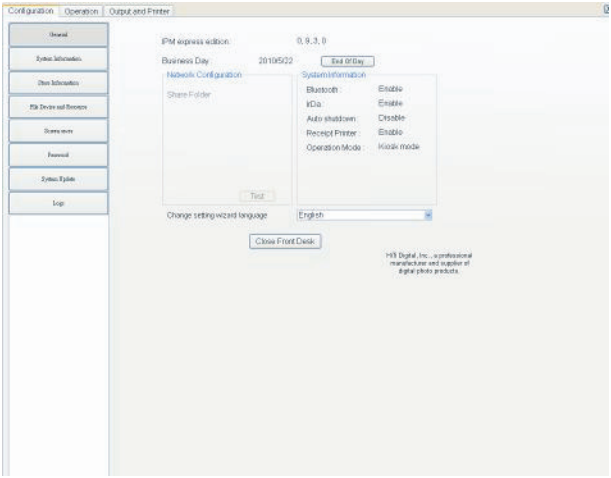

Usage

► Business Day

Financial accounting day; for both 24 hour operating shop and normal, every transaction can be categories by setting Business Day. This function will be hiding if End of Business Day disable.
Related Topics: Store Information

► Change setting wizard language

Language of configuration page; Picvite Kiosk currently support English, Chinese, Arabic, Spanish, Portuguese, German, Russian, French, and Portuguese in the version.

► Close Front Desk

This function would shut down Picvite Kiosk system, and user is required to restart the system after changing any setting.

System Information

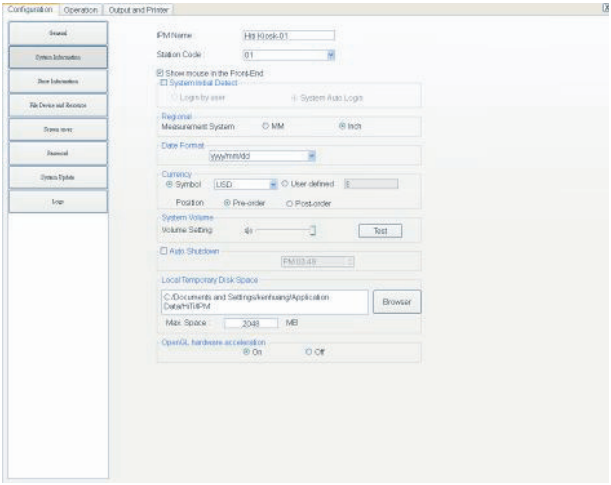

Usage

► System Name

Application name, this is for creating a sales report title.

► Station Code

Identification code, this value is used to identify data transmit flow when linking Minilab system.

► Show mouse in the Front-End

Hide/Show mouse cursor in the front of desk.

► System Initial Detect

This function will run auto detecting process when application booting, it will show message for user and warning when error occur.

Login by user: user needs click OK button to cancel detecting dialogue
System Auto Login: system will cancel detecting dialogue automatically after 1 minute

System Information

► Regional

Measurement units of system, i.e. 4 x 6 “inch” or 10 x 15 “mm”.

► Date Format

Administrator can use this function to determine which type of date format is printed on the photo paper.

► Currency

Administrator can use this function to adjust dollar sign position and symbol.

► System Volume

System will make beep volume when user clicking touch screen if the function is enable.

► Auto Shutdown

System allows user to set auto shutdown timer and it will pop up message in 10 sec remaining, if user has no further behavior, computer power off.

► Local Temporary Disk Space

This function allows Administrator setting the disk space of system for buffer. In case user load too many big files and exceed computer physical disk space.

For example：
Computer physical disk = 80GB
User insert 200 GB image into computer(80GB)? Overloading.

Store Information

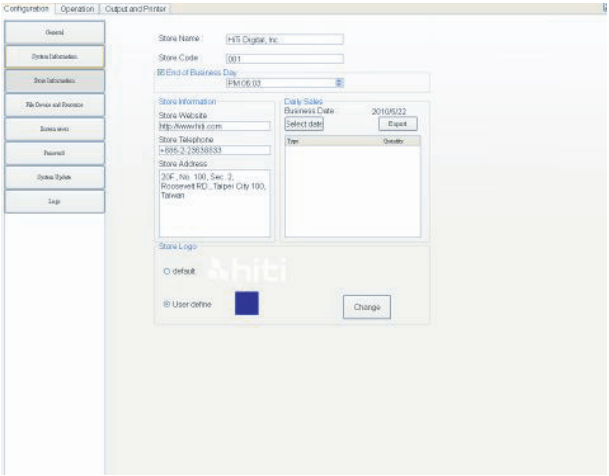

Usage

► Store Name

Store name, this is for creating a sales report title.

► Store Code

Identify code of the computer, this value is used to identify data transmit flow when linking Minilab system.

► End of Business Day

This function allow Administrator enable/disable business day counting, all of transaction records will be categorized by business day when setting time arrival.
For example：X store opening hour is 10:00 AM ~ 02:00 AM
(ie: 2010/5/21 10:00 AM ~ 2010/5/22 02:00 AM)

If Administrator set ***business day = disable***, the daily sales would be separate to two part in the system
2010/5/21 and 2010/5/22, <<2010/5/21 10:00AM~11:59PM + 00:00 AM~02:00AM>>

If Administrator setting ***business day = enable*** , the daily sales would be remained one in the system
2010/5/21, <<2010/5/21 working day>>

Store Information

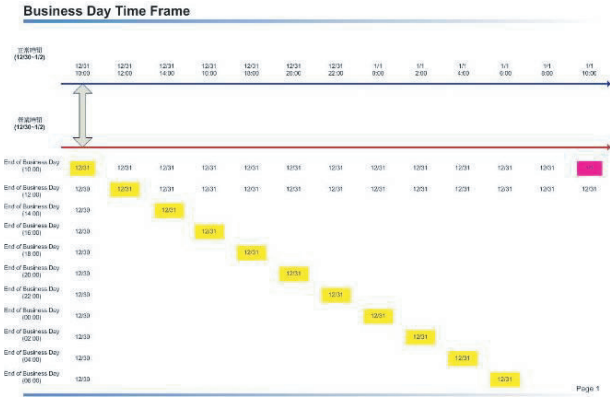

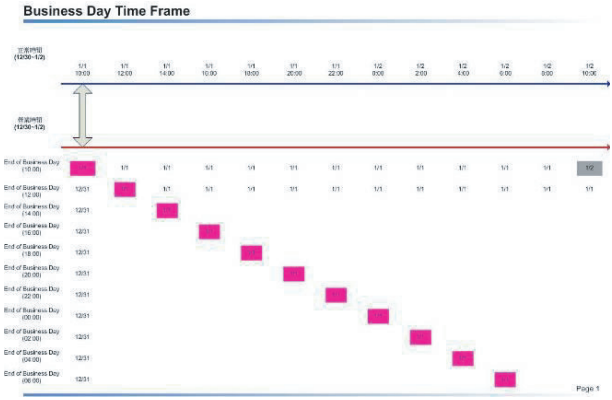

► Store Information

Store information, it would be enabled in next version

► Daily Sales

System will show printing amount of all types of paper size by business day or system day (depend on ***Business day*** function enable/disable)

► Store Logo

User operation screen parameter, default value is “HiTi” logo

File Device and Resource

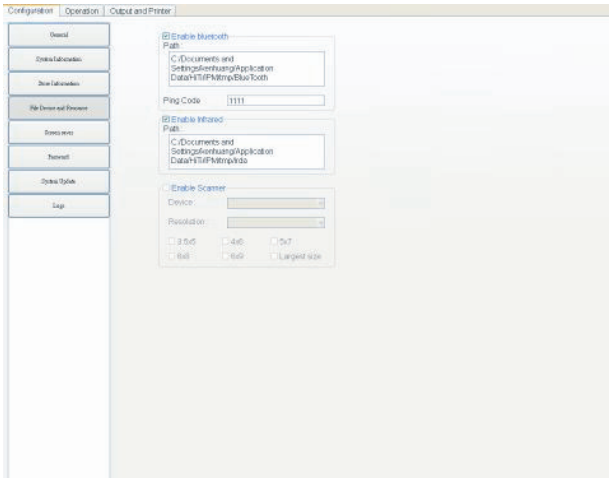

Usage

► **Enable blue tooth**
Bluetooth device on/off

► **Enable Infrared**
Infrared device on/off

► **Enable Scanner**
Infrared device on/off

Device: scanner model type choose
Resolution: scanner input format

Screen saver

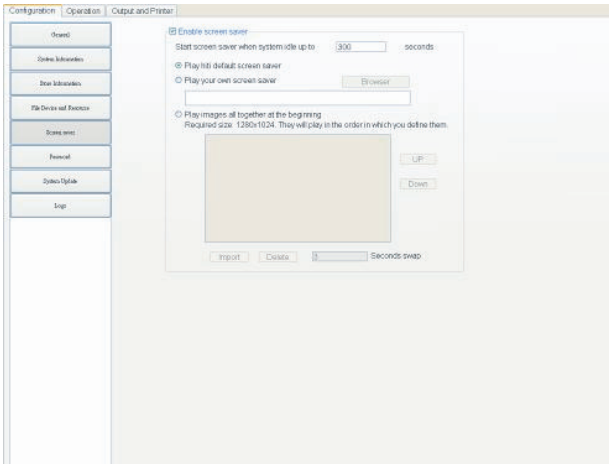

Usage

Enable screen saver, Administrator can set time remainder to lunch screen saver function.
There is Hiti default screen saver in the system or：

1. You can import your own screen saver file (*.gif)
2. Creating a new screen saver file by importing several pictures (*.jpeg)

Password

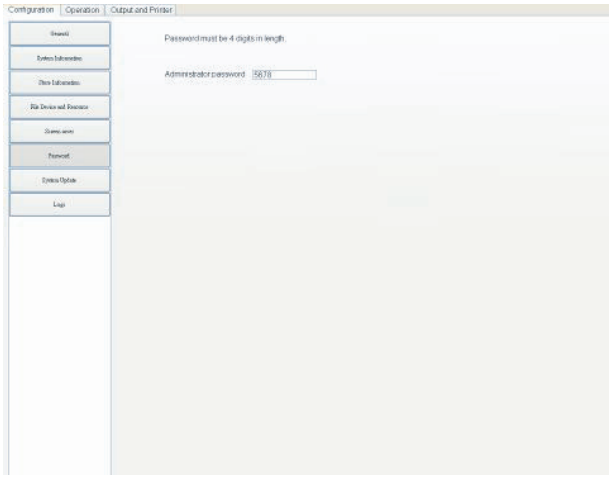

Usage

► Password

System password for four digits
Express version only allow one Administrator account, multiple authorities control function will be developed in the next version.

System Update

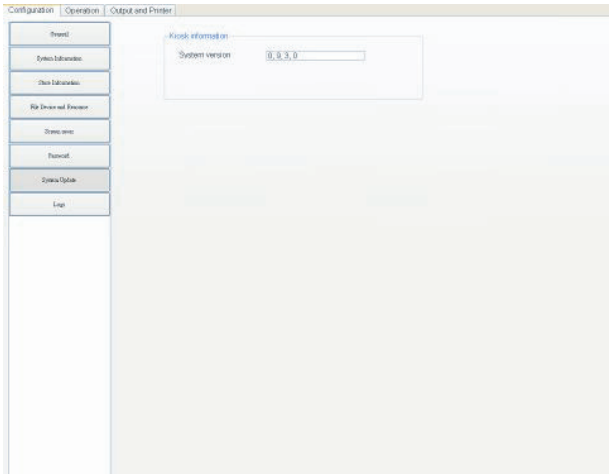

Usage

► Kiosk information

Application version information, other update function will be developed in the next version.

Log

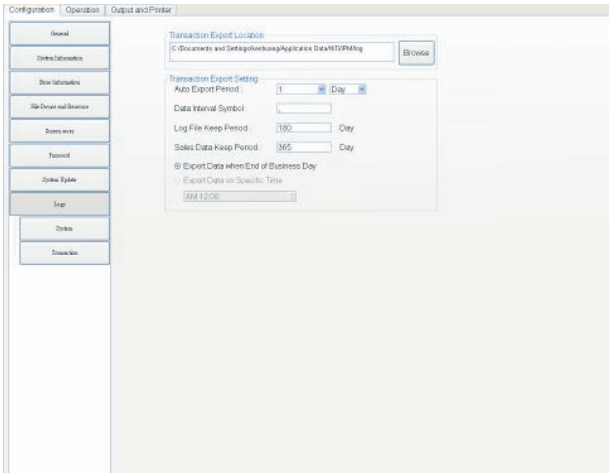

Usage

System will export transaction records by user define period. Administrator can set the time frequency of exporting procedure, there are three types of period could be used:

Day: daily exporting

Week: assign day, Monday to Sunday

Month: assign day, 1 ~ 31, system will auto export data at the first day of next month if Administrator setting “31” but there are only 30 days in this month

► Data interval

System will insert the interval symbol into data stream in order to separate data.

► Log file keep Period

Transaction Log will be saved in the folder, if files no moving or deleting, system will remove that on setting time automatically. ***(Max: 180 days)***

► Sales Data keep Period

All sales records will be saving by remaining time ***(Max: 365 days)***

► Export Data when End of Business Day

If the function enable, exporting procedure will be started when business day change function in activate.

The function will disable if ***End of Business Day*** function closed.

► Export Data on Specific Time

If the function enable, exporting procedure will be started on user demand

The function will disable if ***End of Business Day*** function in activate.

Language

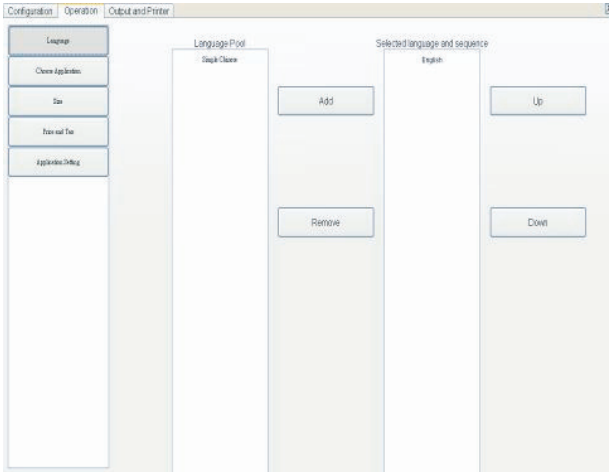

Usage

Language setting, Administrator can decide and choose language types in the language pool. It will change language type on the Front of Desk.

Choose Application

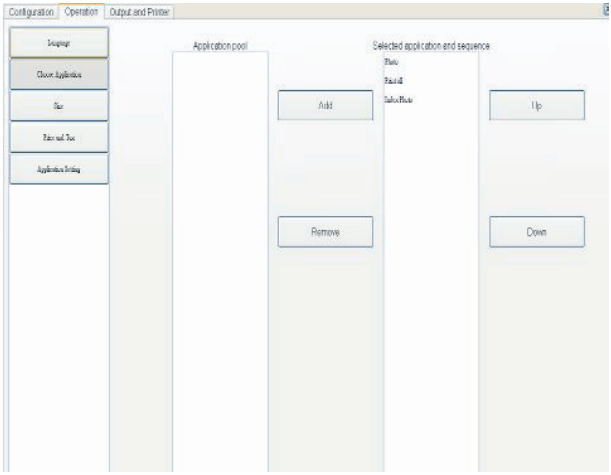

Usage

This function allows Administrator to adjust function sequence and available.

Size

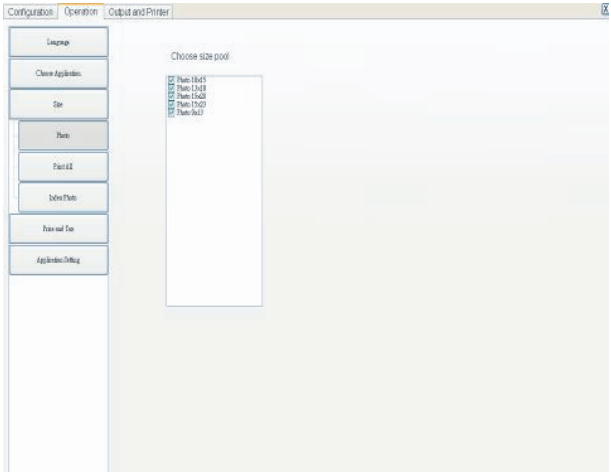

Usage

Printing paper size enable/disable in the front of desk, each of application has its own available paper size setting.

Noticed: Please be sure the consumables in the machine match your setting, otherwise system will show warning message after initial detection.

Price and Tax - Price

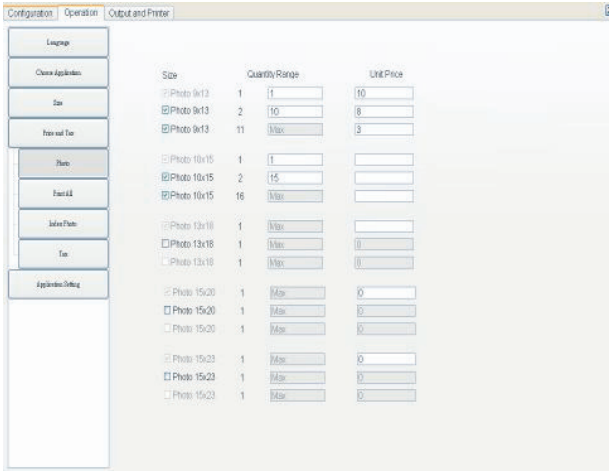

Usage

Printing price, individual section parameters and Administrator can set three kinds of price level depending on quantity. The price information of section is the same as user operation screen, tax issue (including or excluding) could be set in the ***Price and Tax*** section

Including Tax (5%):

Administrator setting: 15 dollars / piece
User price on screen: 15 dollars
Transaction Log: 14.28 (sales price) + 0.72 (tax price)

Excluding Tax (5%):

Administrator setting: 15 dollars / piece
User price on screen: 15 dollars + 0.75 dollars (tax)
Transaction Log: 15 (sales price) + 0.75 (tax price)

Price and Tax - Tax

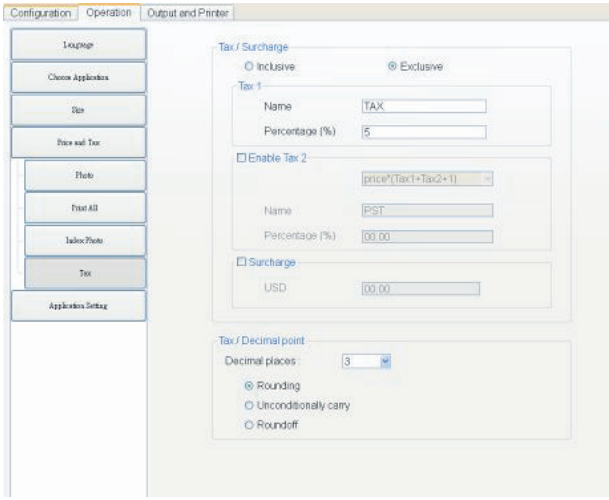

Usage

► Inclusive / Exclusive

Including Tax (5%):

Administrator setting: 15 dollars / piece
User price on screen: 15 dollars
Transaction Log: 14.28 (sales price) + 0.72 (tax price)

Excluding Tax (5%):

Administrator setting: 15 dollars / piece
User price on screen: 15 dollars + 0.75 dollars (tax)
Transaction Log: 15 (sales price) + 0.75 (tax price)

► Tax 2

The function allow Administrator to set second tax policy.

► Tax/Decimal Point

Rounding	12.65=12.7
Unconditionally carry	12.61=12.7
Round off	12.64=12.6

Application Setting - Main

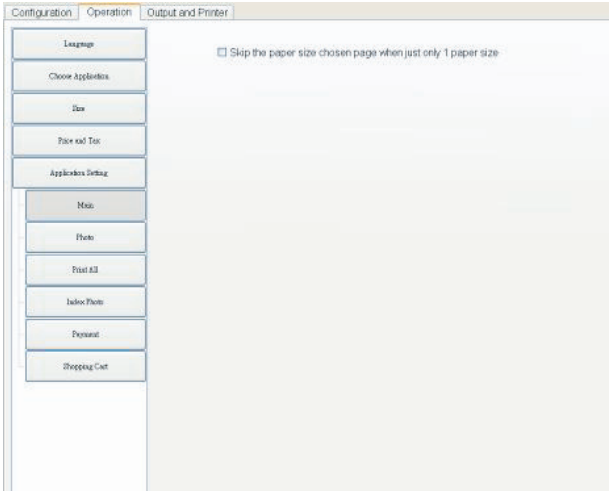

Usage

► Skip the paper size chosen page when just only paper size

The screen would be skip if the check box = Enable and Administrator only set one type of paper size in the ***Size*** configuration

Application Setting - Photo

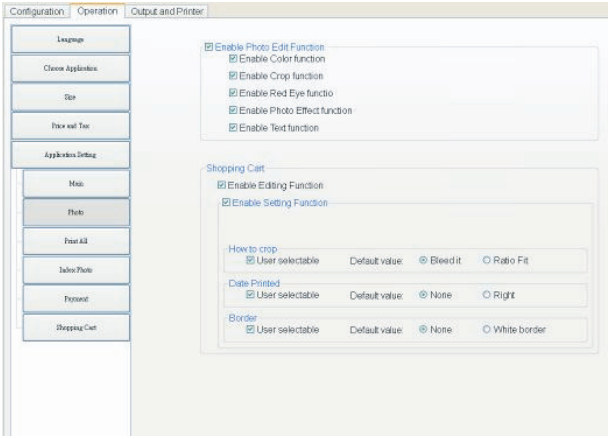

Usage

Administrator can control default value and Enable/Disable functions as below screen.

Shopping Cart Function:

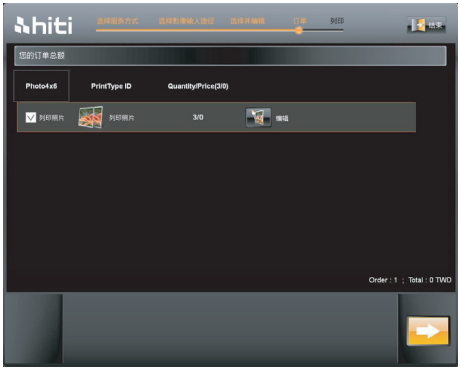

Enable Setting Function:

Enable Photo Edit Function:

Application Setting - Printer All

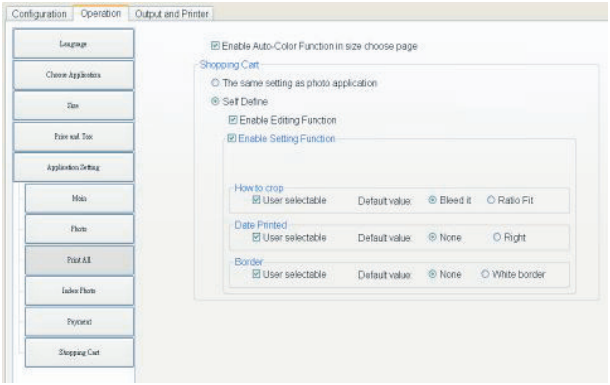

Usage

Administrator can control default value and Enable/Disable functions as below screen.

Enable Auto-Color Function in size choose page

► The same setting as photo application

Administrator can keep these parameters of 「***Print All***」which the same as 「***Photo***」or using ***Self define*** to make new operate flow.

Enable Setting Function

Enable Editing Function

Application Setting - Index Photo

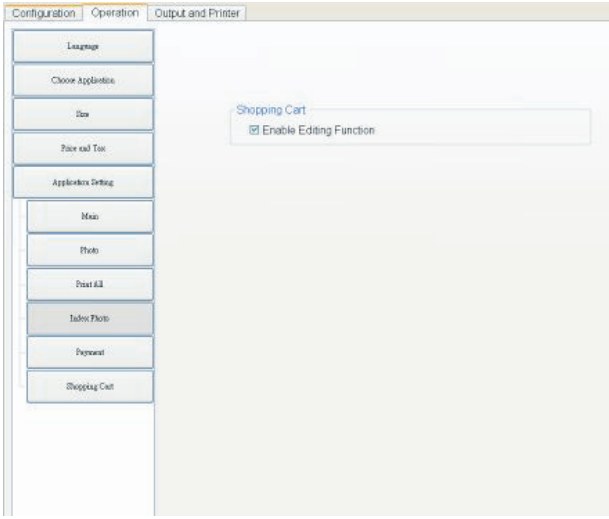

Usage

► Enable Editing Function

Administrator can control default value and Enable/Disable functions as below screen.

Enable Editing Function

Application Setting - Payment

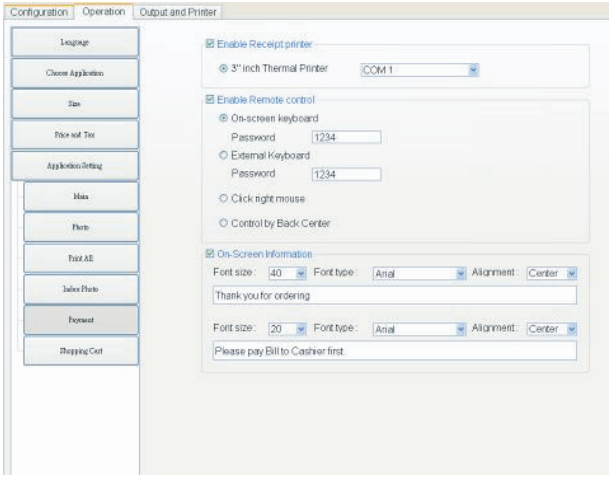

Usage

► Enable Receipt Printer

External thermal device for printing receipt, currently supported models for the EPSON TM-88 Series.

baud rate : 9600

► Enable Remote Control

Administrator can enable this feature to control the printing process; the photo-printing behavior will start after inserted correct control password.

► On-Screen Information

Information for advertisements.

Application Setting – Shopping Cart

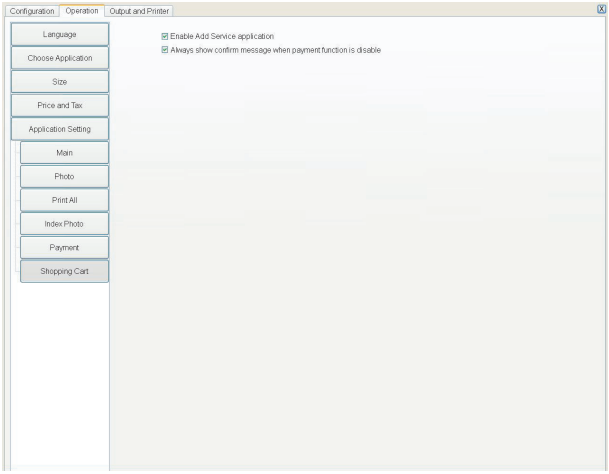

Usage

► Enable Add Service application

Administrator can control default value and Enable/Disable functions as below screen.

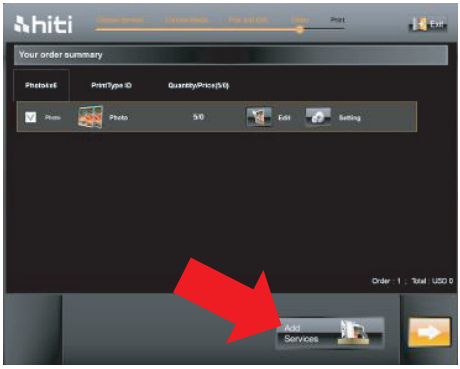

► Always show confirm message when payment function is disable

Double confirm message will be shown before printing if this function is enable and 「***Enable Remote control***」 is disable.

Reference : 「***Operation***」 / 「***Payment***」 / 「***Enable Remote control***」

Printer

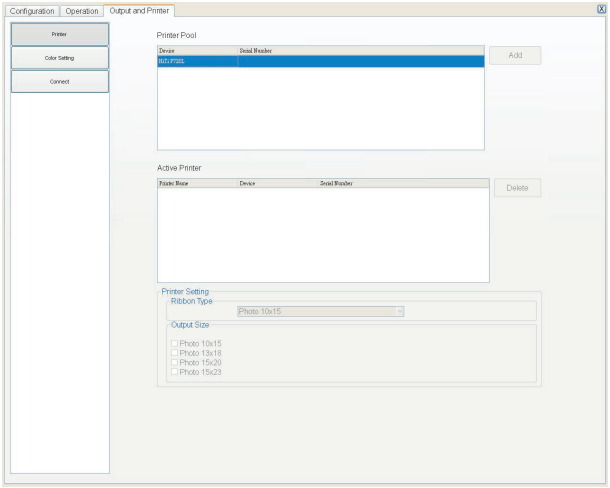

Usage

Administrator can use this tool for adjust printers and specified consumable format.

Operation:

1. Please select printer from the ***Printer Pool*** and press the "Add" button
2. The new printer will appear at the bottom of the ***Active Printer***, it is ready for printing
3. You can press the right of the "Delete" button, then the printer will return to the Printer Pool .

Color Setting

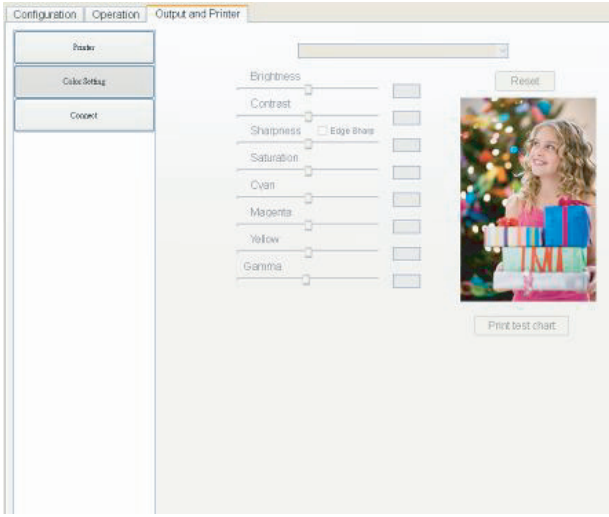

Usage

Administrator can use this function to adjust printing color parameters.

Connect

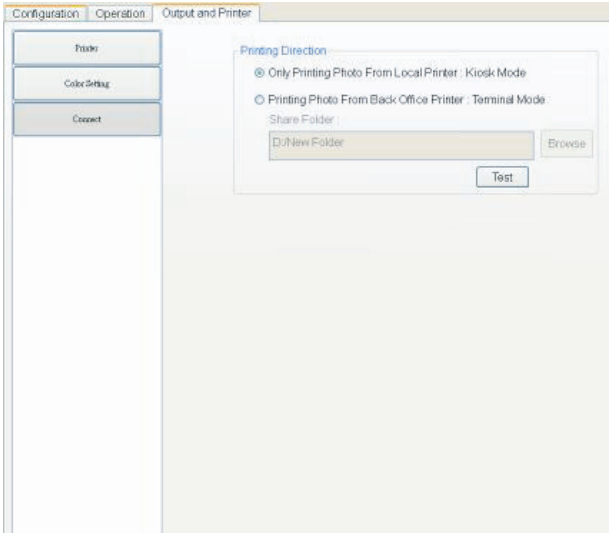

Usage

► Printing Direction

There are two operation modes for choosing:

Kiosk Mode:
Printing out photo paper by local printer

Terminal Mode:
Printing out photo paper by Picvite Mini Lab system (Back Office System)

In the beta site version, only Kiosk mode is available for printing photo

Front End: User Operation Flow

Photo

Description

The function allows user printing their photos before image choosing; photo editing … even deciding copies quantity by each image.

Support Photo Size (Inch):

- 4 x 6 Photo
- 5 x 7 Photo
- 6 x 8 Photo
- 6 x 9 Photo

Print All

Description

The function allows a user to print their photos with few steps few steps; User can click this function for fast and easy photo printing.

Support Photo Size (Inch):

- 4 x 6 Photo
- 5 x 7 Photo
- 6 x 8 Photo
- 6 x 9 Photo

Index Photo

Description

The function allow a user to print their photos as index formats; it means these photos will be adjusted like a small icon and print in the same photo paper.

Support Photo Size (Inch):

- 4 x 6 Photo
- 5 x 7 Photo
- 6 x 8 Photo
- 6 x 9 Photo

Support Photo Format (4 x 6 Photo)

- Landscape 7 x 4
- Landscape 9 x 5
- Portrait 4 x 6
- Portrait 5 x 8

Support Photo Format (5 x 7 Photo)

- Landscape 8 x 5
- Landscape 10 x16
- Portrait 5 x 8
- Portrait 6 x 10

Support Photo Format (6 x 8 Photo)

- Landscape 9 x 6
- Landscape 11 x 17
- Portrait 7 x 9
- Portrait 8 x 11

Support Photo Format (6 x 9 Photo)

- Landscape 11 x 6
- Landscape 13 x 7
- Portrait 6 x 10
- Portrait 9 x 13

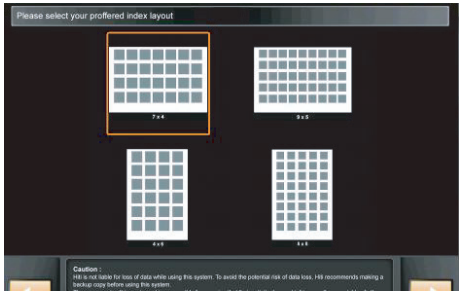

How do I print photo?

Description

Step 1:
Click 「Photo」 button

Step 2:
Choose Paper Size which you prefer.

Step 3:
Insert and choose your storage media before click Next button.

Step 4:
Choose image which you woul.d like to print, there are two ways to adjust copies number:

1. Click image: One click means one copy for print, if you want to print more than one, you can use ***Copies*** button to adjust printing number.
2. Select All : User can use ***Select All*** button and adjust copies number by ***Copies*** button.

Step 5:
Switch On/Off function for personal demand (Photo crop, Date Printing, Border Printing)

Step 6:
Order confirmation page, you can review order list or using ”Add Service” button to add another photo printing order, user may continue to photo editing by pressing the “Setting and Edit” button.

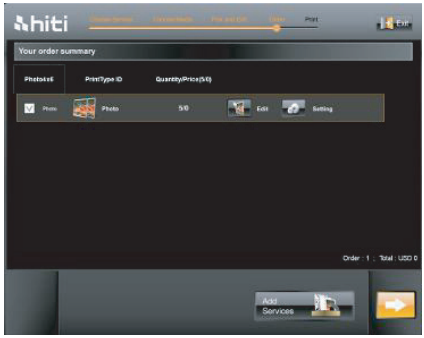

Step 7:
Printing Status, wait for printing finish.

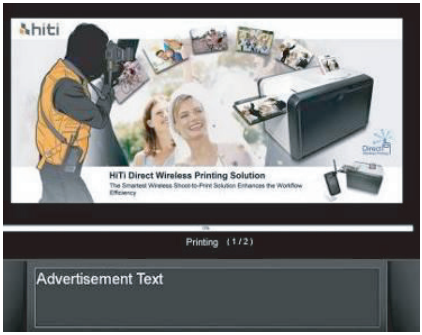

Step 8:
Printing succeed, and you can enjoy your colorful memory.

How do I print All?

Choose Media
Pick and Edit
Order
Print
Welcome to HiTi Photo Kiosk for fast and fun photos. What would you like to do?
Photo
Print All
Index Photo
Print out all your photos with just a click of button
Start

Description

Step 1:
Click 「Print All」 button.

Welcome to HiTi Photo Kiosk for fast and fun photos. What would you like to do?
Photo
Print All
Index Photo
Print out all your photos with just a click of button
Start

Step 2:
Choose Paper Size which you prefer.

Step 3:
Insert and choose your storage media before click Next button.

Step 4:
Switch On/Off function for personal demand (Photo crop, Date Printing, Border Printing)

Step 5:
Order confirmation page, you can review order list or using "Add Service" button to add another photo printing order, user may continue to photo editing by pressing the "Setting and Edit" button.

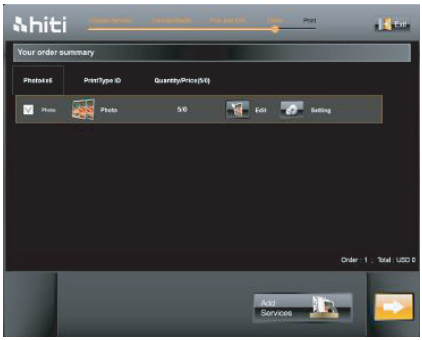

Step 6:
Printing Status, wait for printing finish.

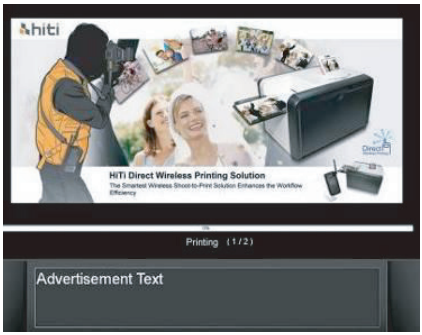

Step 7:
Printing succeed, and you can enjoy your colorful memory.

How do I print photo?

Description

Step 1:
Click 「Index Photo」 button.

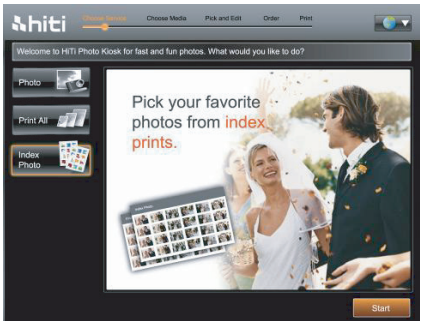
Welcome to HiTi Photo Kiosk for fast and fun photos. What would you like to do?
Photo
Print All
Index Photo
Pick your favorite photos from index prints.
Start

Step 2:
Prefer paper size.

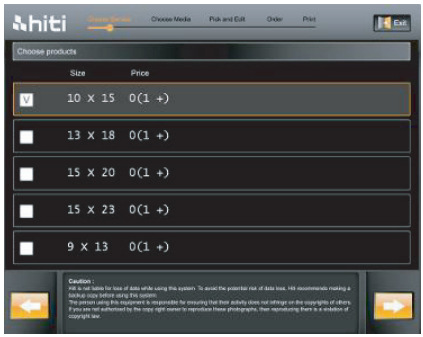

Step 3:
Insert and choose your storage media before click Next button.

Step 4:
Choose an index photo format.

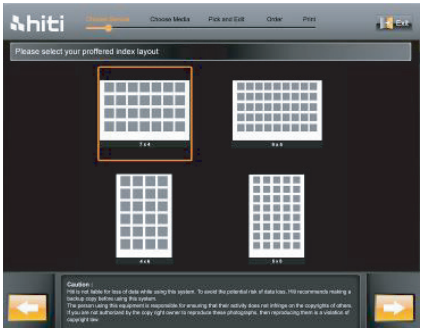

Step 5:
Choose images which you want to put it in the index photo.

Step 6:
Preview for printing, you can switch the arrangement of files by name or snap date with Order by alphabet and Order by date.

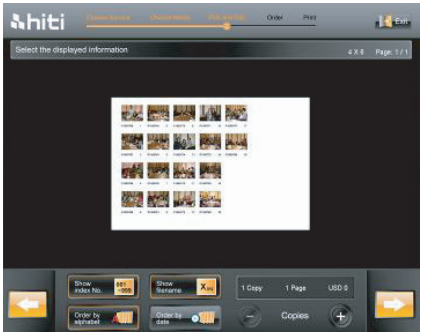

Step 7:
Order confirmation page, you can review order list or using "Add Service" button to add another photo printing order, user may continue to photo editing by pressing the "Setting and Edit" button.

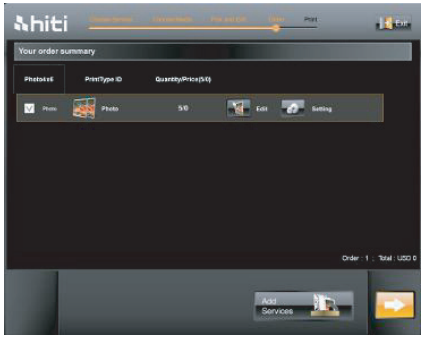

Step 8:
Printing Status, wait for printing finish.

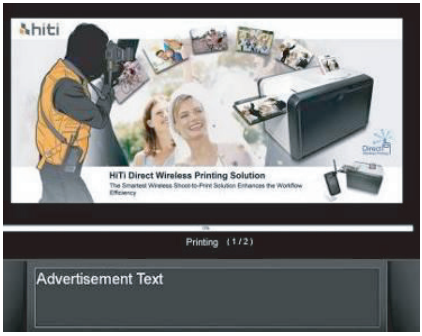

Step 9:
Printing succeed, congratulations you can enjoy your colorful photo index.